



**STRONGER
TOGETHER**

**PRIME
EQUIPMENT GROUP**
Simple Solutions for Poultry Processing


HCF-Series Horizontal Cannister Filters

Model: LFS HCF-10

Prime HCF-Series Horizontal Cannister Filters are designed to remove solids from water that can ultimately be re-used or sent to wastewater treatment systems.

Typically used in conjunction with Prime's LFS-Series Screens as the second of a two-stage process, HCF Series filters pass process water through wedgewire screens with gaps of .005 inches (125 microns), in volumes ranging up to 600 GPM. A typical system includes as a first stage a Prime LFS-Series rotating stainless-steel wedgewire drum screen that pre-screens out particulate smaller than .010 inches (250 microns).

Prime is the leader in water re-use, and our engineering team can spec out any size system for any need, from self-contained units to full-room systems with auto-balancing capabilities.

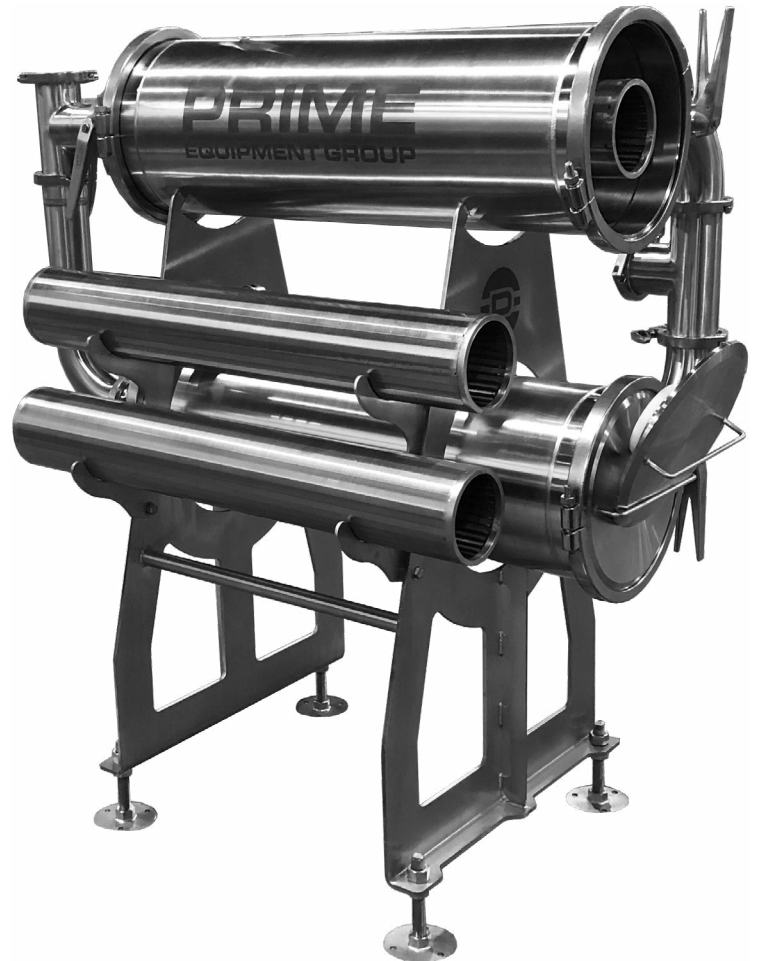

EASY-TO-CLEAN, LOW-LIFT FILTER
REPLACEMENT WITHOUT PLUMBING
DISCONNECTION

INTEGRATED STORAGE RACK FOR
EASY STORAGE AND CLEANING OF
FILTERS

PART OF A FULLY-ENGINEERED PRIME
WATER RE-USE SYSTEM



PRIME ROI:

PRIME WATER RE-USE SYSTEMS SAVE WATER AND MONEY, ON BOTH PROCESS AND TREATMENT WATER

PRIME FULLY-ENGINEERED SYSTEMS MAKE IT EASY TO MEET SUSTAINABILITY GOALS, FROM SMALL UNITS TO FULLY ENGINEERED, AUTO-BALANCED, LARGE-SCALE SYSTEMS

ASK PRIME FOR A WATER AUDIT TO SEE HOW MUCH WATER YOU CAN SAVE

2001 Courtright Road
Columbus, OH 43232 USA

Please call
[+1 \(614\) 253-8590](tel:+1(614)253-8590)

Send us an email
Sales@PrimeEquipmentGroup.com

More info
PrimeEquipmentGroup.com




**STRONGER
TOGETHER**

**PRIME
EQUIPMENT GROUP**
Simple Solutions for Poultry Processing

HCF-Series Horizontal Cannister Filters

Model: LFS HCF-10

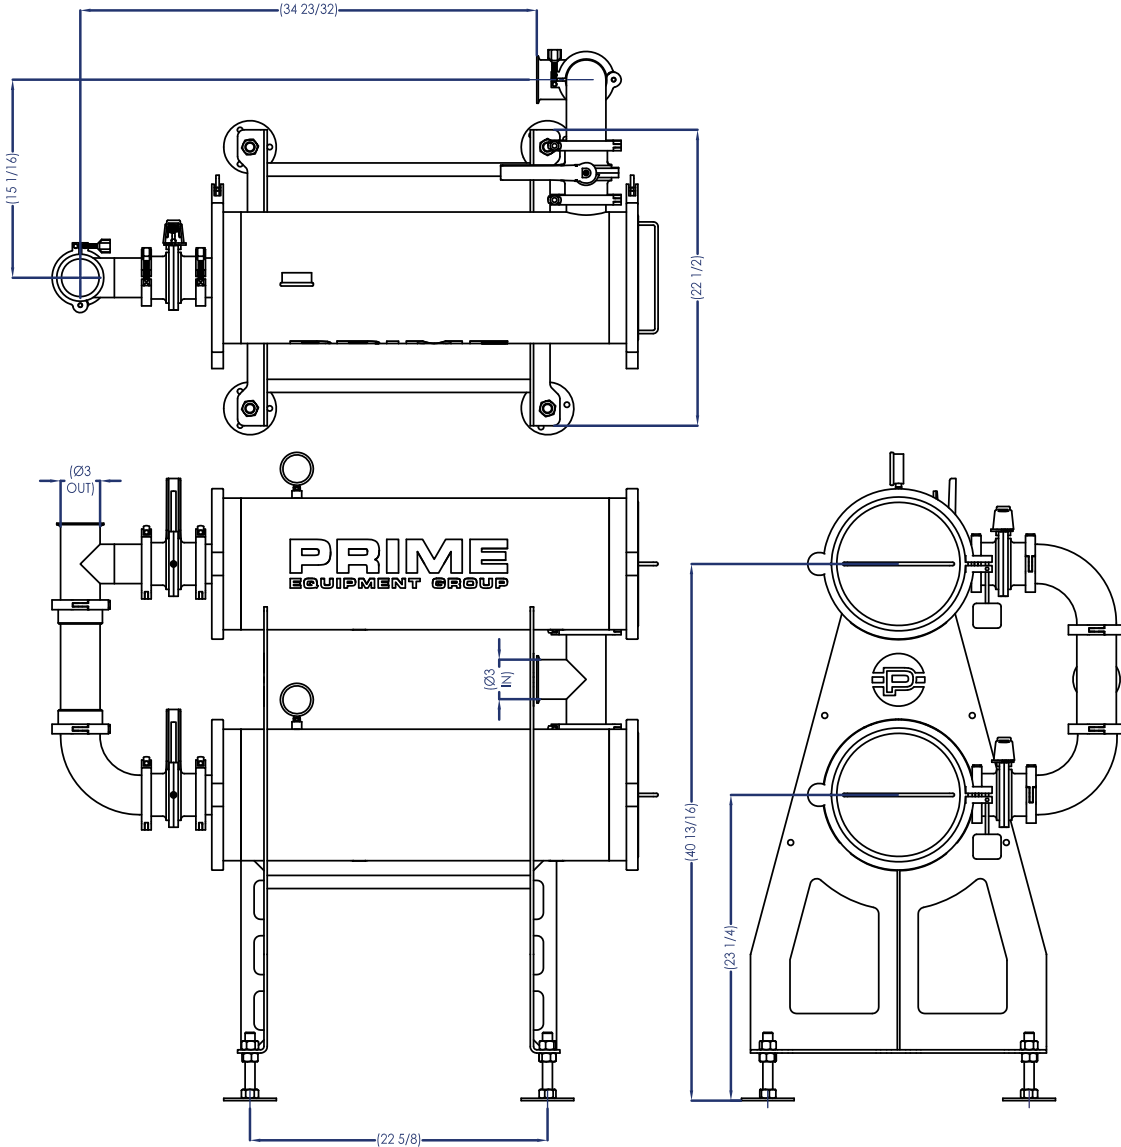

TECHNICAL SPECIFICATIONS

Water specifications	10" Canisters: (2) 3" Sani Tri-Clamp connections 12" Canisters: (2) 4" Sani Tri-Clamp connections
Flow rate	10" Canisters: Max 300 GPM 12" Canisters: Max 600 GPM