



DSI™

CT 32 Consistent Thickness Slicer™



High Capacity Horizontal Slicer

A new wider-lane, more hygienic and efficient slicer

Achieve high capacity with
precise control

Produce more high-quality pounds per day with less maintenance effort and lower water use with the new DSI CT 32 Consistent Thickness Slicer™. Maximize output with continuous blade movement and high-speed belts.

Achieve smooth cuts and superior cut quality every time with a continuous movement blade. The compliant hold-down system eliminates high compression while slicing to reduce variations in product spring back. This results in more consistent thickness, smoother cuts, thicker tails, less product slope and higher portioning yields.



High Capacity Lanes


- Up to 160 butterflies per minute (80 per lane) or 320 fillets (160 per lane)
- 80 feet per minute belt speed (24.4 meters per minute)
- Useable belt width of 12.5" (320 mm)
- Width of dual lane system has been increased to match DSI 800 Series Portioning Systems for improved and simplified product handling

Maximum Uptime

- High-speed, continuously-moving blade allows the slicer to be integrated seamlessly into automated lines
- Simple, mechanical adjustment to change slice thickness in seconds during operation
- Improved conveyor technology decreases maintenance effort and cost

Lower Total Cost of Ownership

- Minimize water consumption of 0.9 gallon/minute (3.3 liter/minute)
- Low cost blade
- Low maintenance effort

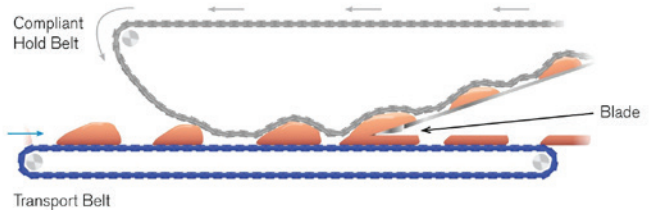

More Consistent Product Thickness

- Patented compliant hold-down system achieves superior results on highly variable incoming product thickness
- Improves consistency of slice thickness up to 30% compared to a typical slicer
- Achieve more consistent batter and breading pickup and improved cook quality

Less Labor

- No need to sort product upstream – compliant hold-down system achieves superior results for highly variable incoming product size
- Slicer design allows automatic transfer from upstream line while matching upstream line speed
- The top slice can be automatically removed
- Easy transition from slicing to portioning
- Designed to promote easy sanitation
- No closed cross sections to make cleaning easy
- Compatible with DSI blade replacement tools

More Versatility

- Reconfigurable in minutes
- Simple switch from top slice removal to slit-and-slide
- Easy to adjust – set the desired slice thickness and the appropriate compression is automatically applied
- Process whole breast meat as heavy as 1,400 grams or process half breasts
- Slice product up to 3.5 inches (88.9 mm) thick


Exceptional Customer Service

JBT equipment is backed by industry-leading customer care solutions and technicians. JBT PROCare® Preventative Maintenance can be purchased separately to maximize uptime and keep your line running smoothly for greater efficiency throughout your operation.




24/7 Maintenance Support

The JBT 24/7 Hotline gives you a direct connection to service technicians and customer service representatives, who can troubleshoot remotely and help keep your facility productive.

JBT DSI CT 32 Consistent Thickness Slicer™ - Specifications

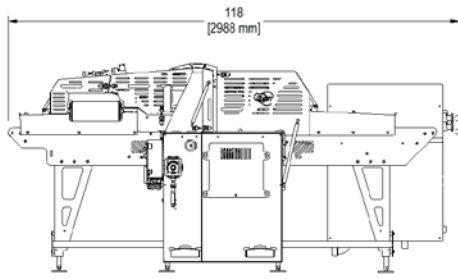

VIEW A-A

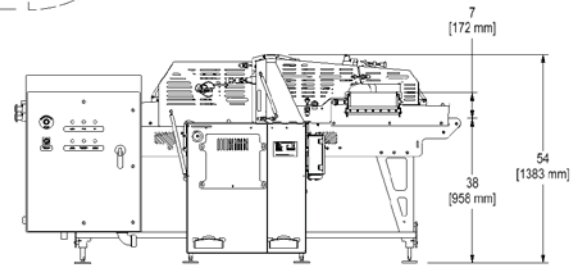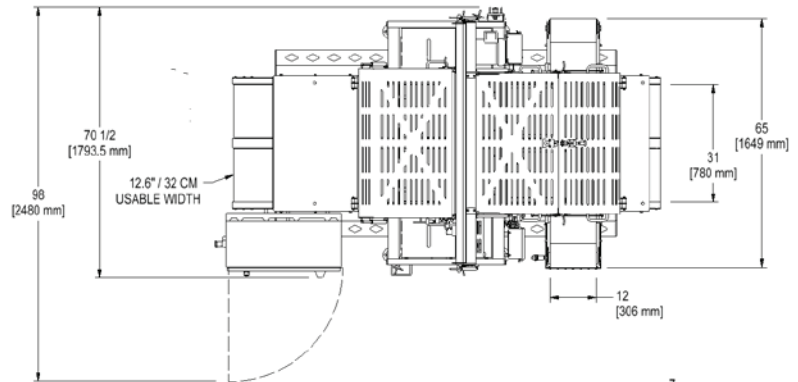

UTILITY REQUIREMENTS

ELECTRICAL POWER TO CT 32 PANEL	Voltage: 380/480 VAC (50/60 HZ) Phase: 3 Amperage: 30 Amps
WATER SUPPLY	Low Pressure (Continuous Supply): 0.9 gal/min (3.3 L/min) High Pressure: N/A
DRAIN	1.0-2.0 gal/min (3.7-7.5 L/min) 3.7-7.5 liter/minute
AIR	N/A
VENTILATION	N/A

JBT PROTEIN PROCESSING

SECONDARY

PORTIONING AND SLICING | BRINE PREPARATION | HOMOGENIZATION
INJECTION & RETURN MILLING | MACERATION | MASSAGING | TENDERIZATION
X-RAY TECHNOLOGY | AUTOMATED TRAY LOADING

FURTHER

COATING | FRYING & FILTRATION | PROOFING | COOKING | COOLING | CHILLING
FREEZING | REFRIGERATION | CLIPPING & PACKAGING SOLUTIONS | X-RAY
TECHNOLOGY | HIGH-PRESSURE PROCESSING (HPP)



North America

JBT
1622 First Street
Sandusky, OH 44870
USA
Phone +1 419 626 0304
Fax +1 419 626 9560
process-solutions@jbt.com

Europe

JBT
Rusthallsгатan 21, Box 913
SE-251 09 Helsingborg
SWEDEN
Phone +46 42 490 4000
Fax +46 42 490 4040
info-europe@jbt.com

Asia

John Bean Technologies (Thailand) Ltd.
159/26 Serm-Mit Tower, Room No. 1602-3
Sukhumvit 21 Road
Klongtoey Nua Sub-district, Wattana
District
Bangkok 10110 Thailand
Phone: + 66 2 257 4000
Fax: + 66 2 261 4099
infoasia-jbtfoodtech@jbt.com

Australia

John Bean Technologies Australia Limited
Unit 1, 40 Rivergate Place
Murarie QLD 4172
Australia
Phone: 07 3896 6100
Fax: 07 3393 9299
info.au@jbt.com
info.nz@jbt.com

Latin America

JBT
Máq. Equip. Ind. Ltda.
Av. Eng. Camilo Dinucci 4605
14808-900 Araraquara
São Paulo
Brazil
Phone +55 16 3301 2000
latinamerica.info@jbt.com



We're with you, right down the line.™

NAParts@jbt.com