





Keel Strip Remover for Turkey

Model No. KSR-1T







The KSR-1T Turkey Keel Strip Remover is designed to remove the keel strip from a full turkey breast fillet, cutting the fillet into three pieces: two breast lobes and a center keel strip. Its high degree of accuracy and consistency improves yields over hand processing, and requires only a single loader in a low-stress capacity that does not require extensive trim training.


See Prime in action: View www.PrimeEquipmentGroup.com/videos

Viewing online? Click here EFFICIENT, EFFECTIVE, CONSISTENT KEEL STRIP REMOVAL POSITIONED DOWNLINE FROM WHOLE BREAST REMOVAL EFFECTIVE AT UP TO 30 WHOLE BREASTS PER MINUTE




PRIME ROI:

IMPROVES YIELD VS. MANUAL KEEL STRIP REMOVAL REDUCES LABOR: ONLY A SINGLE LOADER NEEDED SIMPLE LOADING OPERATION ELIMINATES TRAINING NEEDS FOR MANUAL TRIMMING
















Keel Strip Remover for Turkey

Model No. KSR-1T

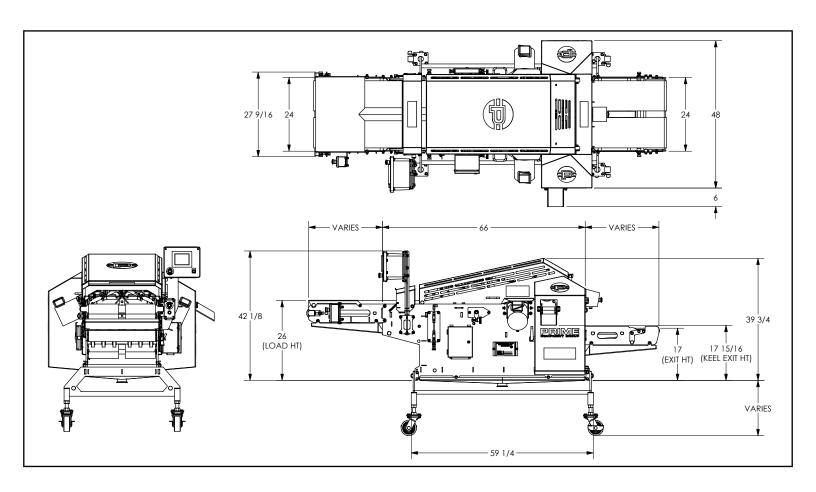

TECHNICAL SPECIFICATIONS

Electrical Requirements:	(1) 2 hp motor, 480/3ph/60Hz/15A (2) 1/2 hp motors, 480/3ph/60Hz/15A
Water Requirements:	(1) 1/4" NPT connection; 2.0 GPM, 40 PSI minimum, room temperature.
Weight:	600 lbs
Production Rate:	Up to 30 Hen/Tom breasts/min
NOTE: Specifications are accurate at time of publication	





