



**STRONGER
TOGETHER**

**PRIME
EQUIPMENT GROUP**
Simple Solutions for Poultry Processing

PAW SCALDER (IN-LINE WITH ILPS) 6-, 8-, AND 10-FT OPTIONS

MODELS: PPS-6,
PPS-8, PPS-10



When used down-line from Prime's In-line Paw Scrubber (ILPS), the PPS-series Paw Scalding Machine gains new efficiencies to reduce hot water usage and lower operating costs. In this application, the Paw Scalding Machine serves as a final cleaning step after the ILPS. Therefore, water temperature in the scalding machine can be lower, preserving fat and increasing final product weight.

See Prime in action: View
www.PrimeEquipmentGroup.com/videos

Viewing online?
Click here

PART OF AN INTEGRATED SOLUTION
FOR PAW PROCESSING

WORKS WELL DOWN-LINE FROM IN-LINE
PAW SCRUBBER

AIR-ASSISTED TOP COVER LIFT FOR
EASY MAINTENANCE



PRIME ROI:

LOWER H2O TEMPERATURES FOR HEATING SAVINGS

LOWER-TEMPERATURE WATER PRESERVES FAT
CONTENT IN FINAL PRODUCT, INCREASING YIELD

ALLOWS FOR UPGRADED PAWS

2001 Courtright Road
Columbus, OH 43232 USA

Please call
+1 (614) 253-8590

Send us an email
Sales@PrimeEquipmentGroup.com

More info
PrimeEquipmentGroup.com




STRONGER TOGETHER

PRIME EQUIPMENT GROUP
Simple Solutions for Poultry Processing

PAW SCALDER (IN-LINE WITH ILPS) 6-, 8-, AND 10-FT OPTIONS

MODELS: PPS-6,
PPS-8, PPS-10

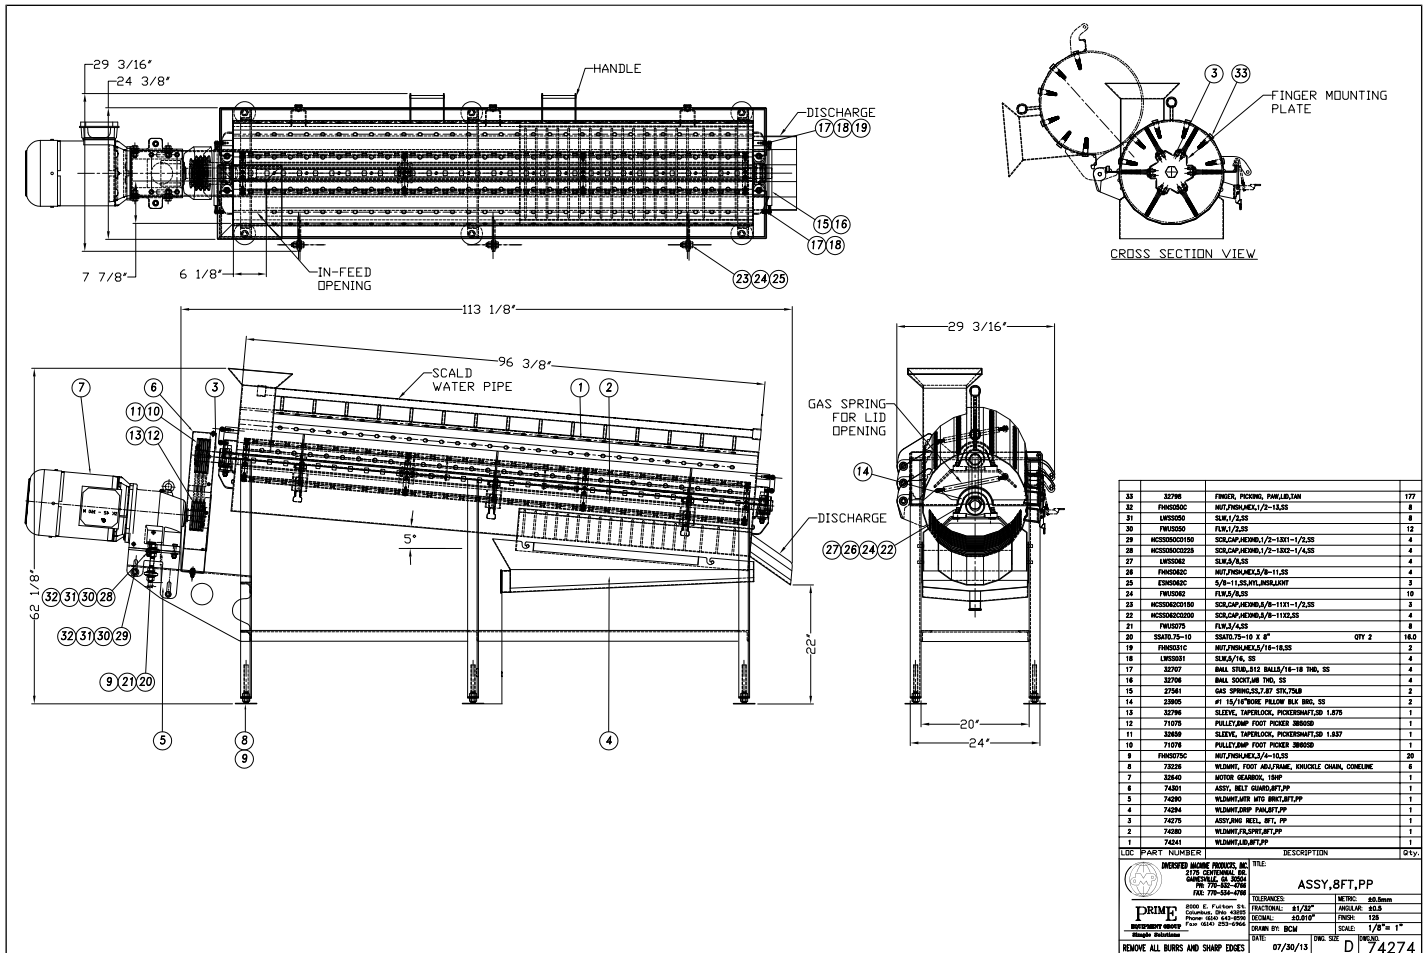

TECHNICAL SPECIFICATIONS

Electrical Requirements:	PPS-6: (1) 10 hp motor; 230/460V, 3 ph, 60 Hz PPS-8/10: (1) 15 hp motor; 230/460V, 3 ph, 60 Hz
Water Requirements:	(1) 3/4" connection
Net Weight:	1,750 lbs. (794 kg)
Production Rate:	Up to 280 paws per minute
NOTE: Specifications are accurate at time of publication	

PRIME EQUIPMENT GROUP
1775 COLUMBUS RD
COLUMBUS, OH 43234
TEL: 773-554-4747

DATE: 07/30/13

SCALE: 1/8" = 1"

REMOVE ALL BURRS AND SHARP EDGES

ASSY_8FT_PP

D 74274