


# TIPPER TIE™

## SPR Press Tie

Table Clipper

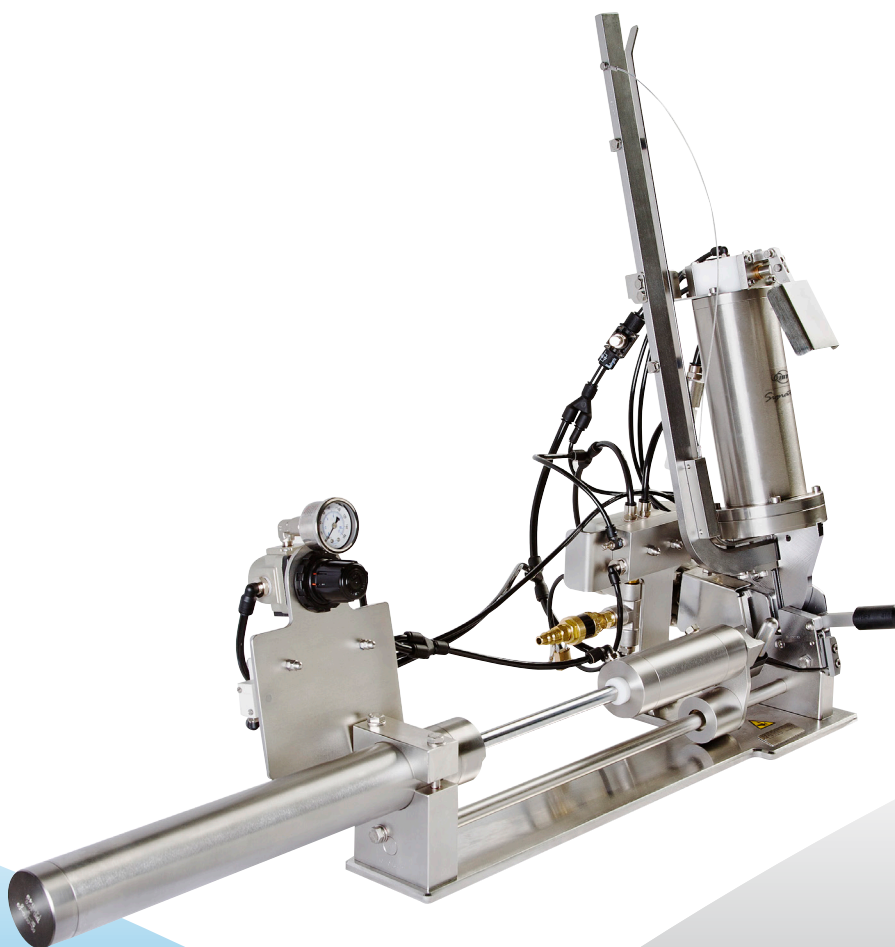

Low-cost packaging of pressure-packed products

# SPR Press Tie Table Clipper

## Area of Application

The Signature Series SPR Press Tie is ideal for low-cost packaging of pressure-packed products with uniform density or circumference. The Press Tie is the easiest and most reliable way to pack portion-controlled items such as Canadian bacon, smoked butts, rolled and flattened hams, and rolls of all kinds.

## Technology & Function

The SPR Press Tie bench clipper is capable of handling all types of casings including fibrous and coated fibrous, as well as plastic and poly stockinette. The SPR features an adjustable air pressure control that permits the casing pulling cylinder to operate at any pre-set air pressure. Each model is constructed from stainless steel and other non-corrosive materials, meeting sanitary design requirements.

The SPR is easy to use, applying a secure seal with one quick, continuous motion. This hand-operated clipper gathers, draws the product tight and then clips the package. Vertically mounted and pneumatically


operated, it is available in several clip sizes to suit the product.

## Advantages

- Low lifecycle costs due to robust design
- Minimal service and maintenance costs
- High stability with simultaneous loading of a very small production area
- Hygienic design, smooth surfaces, stainless steel materials
- The high closure speed supports the ergonomic workflow of the operator
- Precise control over clip closure pressure

## Equipment versions

- A knife ensures straight ends with a good appearance
- The FRL assembly (filter/regulator/lubricator) provides clean operating air at the right pressure, reducing maintenance costs.

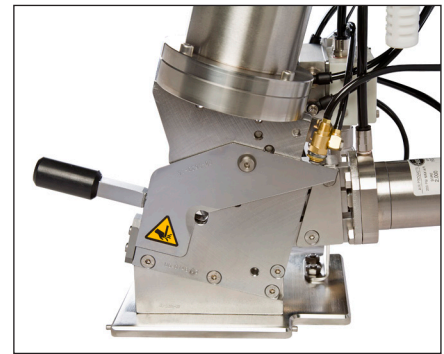

Gate allows easy entry of product and superior voiding of casing or netting material.



Adjustable air pressure gauge provides optimum package tightness.



Ergonomic design eliminates worker strain via a knurled cylinder clamp that firmly grips casing to pull product.

## Technical Specifications

|                         |  |
|-------------------------|--|
| Dimensions (L x W x H): | 37.9 x 15.9 x 28.5<br>(962 x 403,9 x 723,9 mm)       |
| Weight:                 | 60 lbs (27,2 kg)                                     |
| Air Consumption         | .3 CFM per cycle @ 80 PSI<br>(8,5 liters at 5,5 bar) |
| Clip type, SPR463:      | 410K and 411K  |
| Clip type, SPR465:      | 400G, 401G, 401T, 451T                               |

## JBT PROTEIN PROCESSING

### SECONDARY

BRINE PREPARATION | HOMOGENIZATION | INJECTION  
INJECTION & RETURN MILLING | MACERATION | MASSAGING | TENDERIZATION  
X-RAY TECHNOLOGY | AUTOMATED TRAY LOADING

### FURTHER

WEIGHING | PORTIONING/TRIMMING | COATING | FRYING & FILTRATION | PROOFING  
COOKING | COOLING | CHILLING | FREEZING | REFRIGERATION | CLIPPING & PACKAGING  
SOLUTIONS | X-RAY TECHNOLOGY | HIGH-PRESSURE PROCESSING (HPP)

### North America

TIPPER TIE, Inc.  
2000 Lufkin Road  
Apex, NC 27539 USA  
Tel. +1 919 362 8811  
Fax +1 919 362 4839  
Tippertie@jbt.com

### Europe

TIPPER TIE TECHNOPACK GmbH  
Wilhelm-Bergner-Strasse 9a  
21509 Glinde/Germany  
Tel. +49 40 72 77 04 0  
Fax +49 40 72 77 04 100  
infoDE@jbt.com

### Latin America

JBT  
Máq. Equip. Ind. Ltda.  
Av. Eng. Camilo Dinucci 4605  
14808-900 Araraquara  
São Paulo  
Brazil  
Phone +55 16 3301 2000  
latinamerica.info@jbt.com



TIPPER TIE™

We're with you, right down the line.™

[tippertie.com](http://tippertie.com) | [jbt.com](http://jbt.com)

SPR-PRESS-TIE-EN2022.01