

Hybrid Evaporator



JBT Hybrid Evaporator T.A.S.T.E.
Stage + FCE Stage

JBT Hybrid Evaporator T.A.S.T.E. Stage + FCE Stage

This family of evaporators is expressly designed for vegetable and tropical fruit products with superior concentrates quality and low operating cost.

These evaporators operate on the principle of the shortest time exposure to processing temperatures and a thermally accelerated descending flow in the first stage where product is most sensitive to heat treatments.

Description of the T.A.S.T.E. stage, single pass type (pre-concentrator)

The inlet product at ambient temperature or pre-heated is fed to the evaporator feed tank. The buffer tank capacity should be able to guarantee the process continuity. The standard juice flow pattern is a downward flow pattern. Juice enters the evaporator from the top of the T.A.S.T.E. and will pass through a spray nozzle.

At this point the incoming juice will flash into the distribution section. This flash causes a sudden expansion of the feed, thus atomizing the liquid. This fog-like mixture of vapor and atomized liquid fills the distribution area and enters the tubes in the stage body, under turbulent flow conditions. The mixture accelerates downward through the tubes as it absorbs heat from the tube walls.


Due to heating a constant pressure, the evaporation takes place at constant temperature. As the juice evaporates, velocity of mixture increases inside the tube.

The juice and evaporated water vapor exit the T.A.S.T.E. tube nest at the bottom. The vapour enters a cyclone type separator where the vapor is separated from entrained product. The juice then is transferred by pump to the next stage.

Description of the FCE stage (finisher)

This stage is a classic forced circulation design, having as Main Features:

- Reduced holding times, particularly at the higher concentrations where the thermal damage is greater;
- Very low temperatures in the effect;
- Very high circulating speed in the stage in order to minimize the product's thermal damage during the heating phase (inside the tube nest);

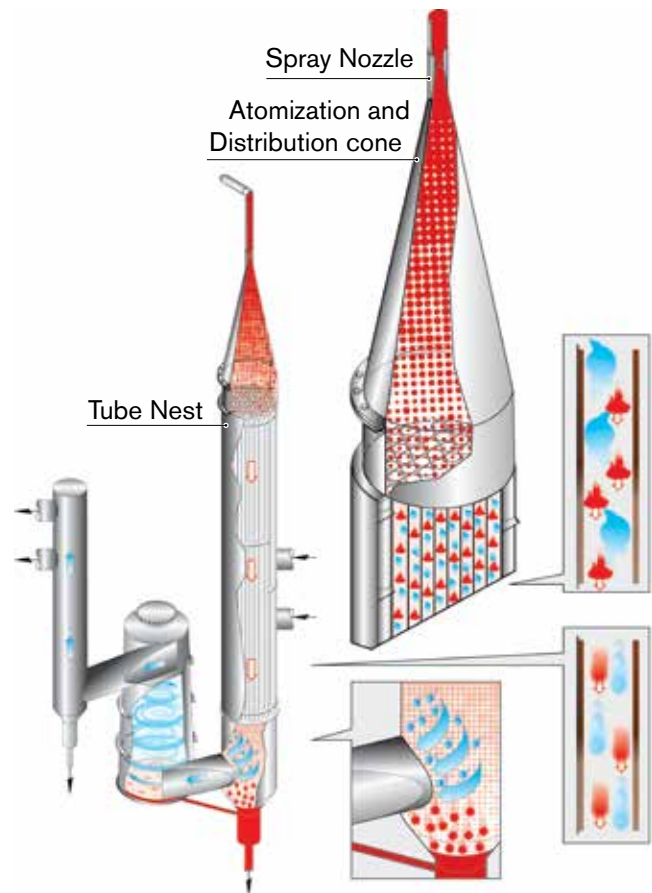



T.A.S.T.E. Stages /Effects are Not Falling Film Type

- Longer operating cycle even with highly viscous products (low bostwick).
- Reduced water consumption, because the water is only required for technical needs, such as: pump seal cooling, make up in the cooling tower circuit, etc.
- Optical residue of the final concentrated product fine controlled
- Product recirculation pump, helical-centrifugal type with high performance, specially designed and tested to operate with highly viscous products (low bostwick).
- The special inducers ensure a very high efficiency at very low NPSH, thus preventing the well known cavitation phenomena even in the most difficult working conditions.
- Automatic plant setting-up.
- Positive-displacement pump for product transfer and extraction, automatically operated by servo-control.

Key benefits:

Increased utilisation of the machine, the capability to process wide variety of products at the different season of the year

- Reduction of energy consumption (or reduced installed power)
- Improved organoleptic properties of the output product, to achieve the highest final resultant quality for viscous products
- Less maintenance
- Simpler to run
- Fast to clean

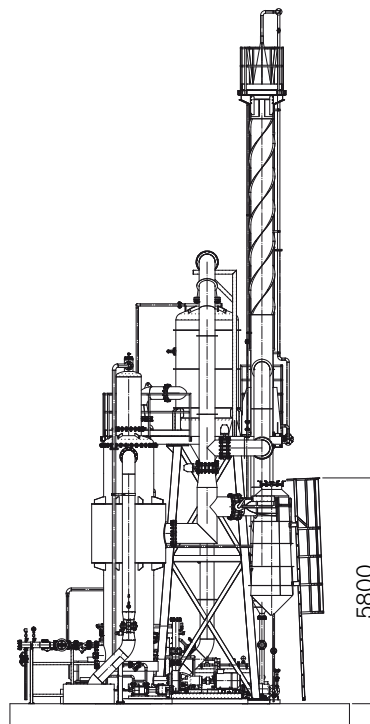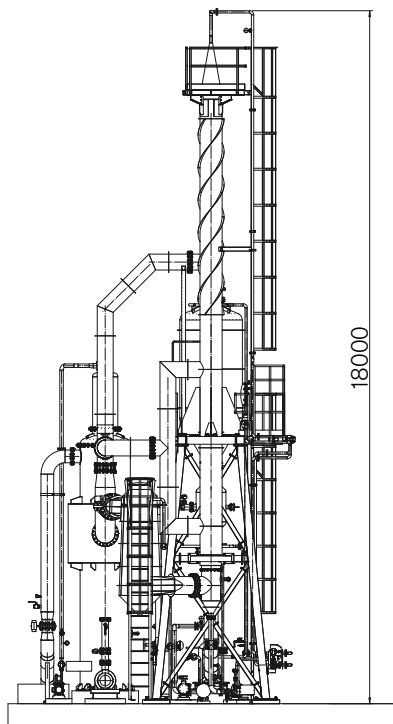


APPROXIMATE SPECIFICATIONS

A* = Overall height 18000 mm

B* = Overall width 6750 mm

C* = Overall length 7800 mm

* The dimensions quoted refer to the machine as shown and may vary according to the processing capacity.

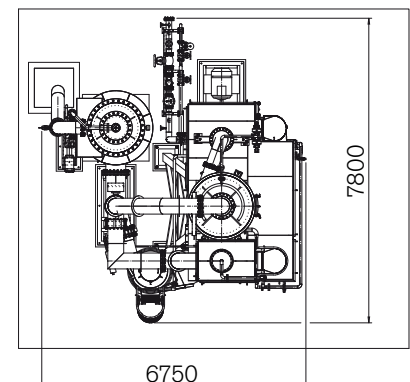

COUNT ON JBT TO HELP PROTECT YOUR INVESTMENT

JBT's greatest value in PRoCARE® services comes from preventing unexpected costs through smart, purposeful, and timely maintenance based on unmatched knowledge and expertise. PRoCARE service packages are offered as a maintenance agreement in various service levels, depending on your production and cost management requirements.



JBT DIVERSIFIED FOOD & HEALTH

FRESH PRODUCE TECHNOLOGIES | FRESH-CUT, ROBOTICS, STEAMING | FRUIT AND VEGETABLE PROCESSING | SECONDARY PROCESSING | ASEPTIC SYSTEMS | FILLING AND CLOSING | IN-CONTAINER STERILIZING | TRAY SEALING | SECONDARY PACKAGING | HIGH-PRESSURE PROCESSING | POWDER PROCESSING | TUNA PROCESSING

OUR BRANDS



Europe

John Bean Technologies SpA
Via Mantova 63/A
43122 Parma
Italy
Phone: +39 0521 908 411
Fax: +39 0521 460 897

John Bean Technologies NV
Breedstraat 3
9100 Sint-Niklaas
Belgium
Phone: +32 3 780 1211
Fax: +32 3 777 7955

John Bean Technologies Foodtech Spain S.L.
Autovía A-2, Km 34,400 - Edificio 1 y 3
28805 Alcala de Henares
Madrid, Spain
Phone: +34 91 304 0045
Fax: +34 91 327 5003

Latin America

JBT de México S de RL de CV
Camino Real a San Andrés Cholula No. 2612
Col. San Bernardino Tlaxcalancingo
72820 San Andrés Cholula, Puebla
México
Phone: +52 222 329 4902
Fax: +52 222 329 4903

North America

John Bean Technologies Corporation
400 Fairway Avenue
Lakeland, FL 33801
USA
Phone: +1 863 683 5411
Fax: +1 863 680 3672

John Bean Technologies Corporation
2300 Industrial Avenue
Madera CA 93639
USA
Phone: +1 559 661 3200
Fax: +1 559 661 3156

South America

John Bean Technologies Máq. e Equip. Ind. Ltda.
Av. Eng Camilo Dinucci 4605
14808-900 Araraquara, São Paulo
Brazil
Phone: +55 16 3301 2000
Fax: +55 16 3301 2144

Asia Pacific

John Bean Technologies (Shanghai) Co., Ltd.
Room 1908, Hongwell International Plaza, 1600
West Zhongshan Road,
Xuhui District, Shanghai 200235,
PRC
Phone: +86 21 3339 1588
Fax: +86 21 3339 1599

John Bean Technologies (Thailand) Ltd.
No. 2525 FYI Center Building 2, 9th Floor
Unit No. 2/901-2/903, Rama IV Road
Klongtoei, Bangkok 10110
Thailand
Phone: +66 (0) 2257 4000
infoasia-jbtfoodtech@jbt.com

South Africa

John Bean Technologies (Pty) Ltd.
Koper Street
Brackenfell
Cape Town, South Africa 7560
Phone: +27 21 982 1130
Fax: +27 21 982 1136



We're with you, right down the line.™

hello@jbt.com | jbt.com

