



SEAL ONLY

T10

A bench mounted sliding base tray seal machine with contoured film cutting facility and capable of sealing up to 6 packs per minute

The T10 is a small, compact and robust bench mounted tray sealing machine. Capable of up to six cycles per minute, the **T10** is ideal for low volume production and production trials. With the ability to utilise a wide range of materials, it is a very useful and versatile machine.




Packaging Materials

Trays

- C-PET
- A-PET
- R-PET
- Polypropylene
- PVC / Styrene
- Board / Paper
- Smooth Wall Foil
- Cardboard
- Sandwich Skillets

Lidding

- Co-extruded and Laminated Polyester Films
- Foil
- Board
- Paper

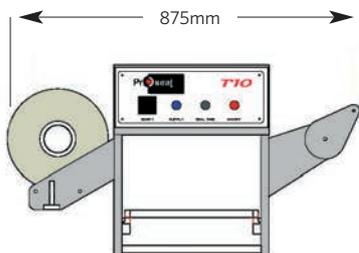

Standard design features and benefits

- Two minute tool changeover
- Low maintenance polymer bearings
- Simple and accurate film-feed system with easy film route
- Maintenance friendly robust construction
- Accurate temperature and seal pressure control
- Fully portable bench mounted
- High accuracy tool alignment system provides a constantly accurate sealing and/or film-cutting relationship with the tray flange profile
- Two position interlocked sliding base mechanism and a fully enclosed seal area
- Manual film-feed and skeletal waste rewind
- Simple design and operation
- All around seal only (No Cut) for packs with pre-cut or hinged lids
- All around seal and contoured film-cut
- Portable, with separate compressor (optional extra). Can be operated from a standard 220-240 VAC supply
- Automatic seal operation with accurate seal dwell time
- Food industry approved hygienic construction and washdown protection
- Full Category 3 guarding
- Sale, Lease Purchase and Rental options available

Options available

- Foil crimping
- Deep tray/pot machine configuration
- Pharmaceutical Blister Packaging Machines
- Sandwich Pack Sealing for Board, Recyclable and Non Recyclable Plastic

T10 Specifications

Height	475mm
Standard Length	875mm
Width	743mm
Weight	45kg
Pneumatic supply	3CFM (85L/min) at 80psi (5 bar)
Electrical supply	230 VAC 50Hz 1kW

Transformers are available to accommodate the electrical supplies in different countries

T10 Sealing capacity

The T10 can accept film cut trays of up to 230mm length x 200mm width and board lidding sizes of up to 280mm length x 240mm width

T10 Production Speed

Up to 6 cycles per minute



READY MEALS | SMOOTH WALL FOIL



SEAFOOD | C-PET



SANDWICHES | BOARD



PRODUCE | A-PET



FISH | BOARD